

# SIO WOOD DOOR SYSTEMS

LINEAR AND STACKING/FOLDING SYSTEMS




**SIO VASUNDDHARA**  
INTERNATIONAL PRIVATE LIMITED


PEOPLE | CUSTOMERS | GROWTH

K - 2/836, Vasant Kunj Road, Near Mata Chowk, Mahipalpur, New Delhi - 110 037, INDIA.  
Ph: +91 11 2678 5169 / 4103 2065 • Email: [contact@sio.co.in](mailto:contact@sio.co.in) • Web: [www.sio.co.in](http://www.sio.co.in)  
For Distribution Inquiries: +91 99104 89457 • For Institutional Inquiries: +91 99589 98108


# SIO Wood Linear Door Systems.



SIO Wood Linear Door Systems for exterior and interior applications.

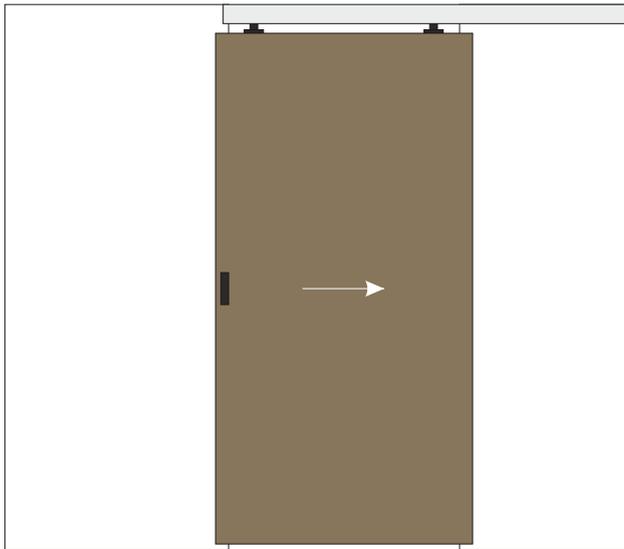


## SIO Woodslide 100

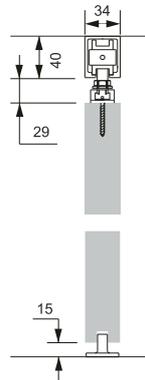


- Kit consists of top track profile, hanger brackets, stopper, bottom guide.
- Reliable performance
- Smooth and silent operation
- Ideal for wardrobes, home and office partitions.
- Max. panel weight: 100 kg.

## SIO Woodslide 150

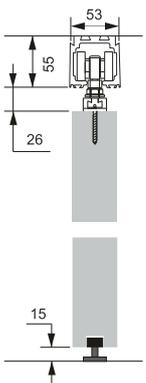

- Kit consists of heavy-duty top track profile, hanger brackets, stopper, bottom guide.
- Reliable performance
- Smooth and silent operation
- Ideal for walk-in wardrobes, large partitions.
- Max. panel weight: 150 kg.


## SIO Woodslide 250

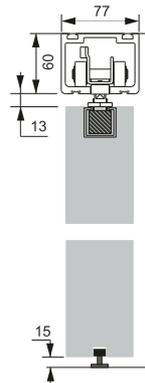

- Kit consists of very heavy-duty top track profile, hanger brackets, stopper, bottom guide.
- Reliable performance
- Smooth and silent operation
- Ideal for very large partitions.
- Max. panel weight: 250 kg.





# SIO Wood Stacking/Folding Door Systems.



SIO Wood Systems are joined together using folding SS hinges complete with hangers running in an aluminium track. The hangers have bearings that are smooth running and maintenance free.

The system can be adjusted both laterally and vertically thus allowing for maximum flexibility in site conditions. Bottom drop bolts ensure that the panels remain rigid. A flush guide channel in the floor is required. A maximum of eight panels per side can be used with maximum panel weight of 120 kg.

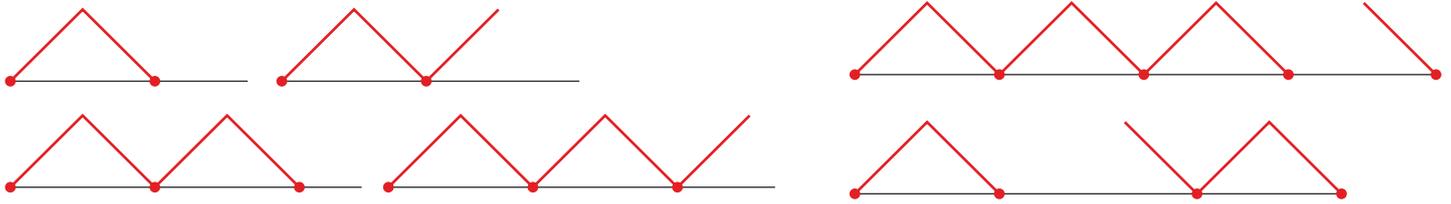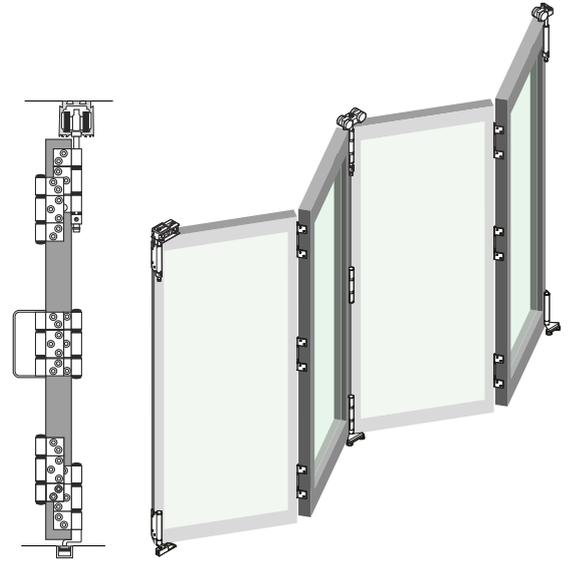



## Hardware Fittings in use



# SIO Telescopic Slide Wood Door Systems.

Allows simultaneous sliding of two wooden door panels in the same direction.

- Heavy-duty aluminium top track profile and robust delrin roller assembly ensures smooth sliding, silent movement and long lasting reliability.
- Toothed timing belt for continuous reliable operation.
- Weight capacity - 100 kg per panel
- Door thickness - 35 mm to 50 mm

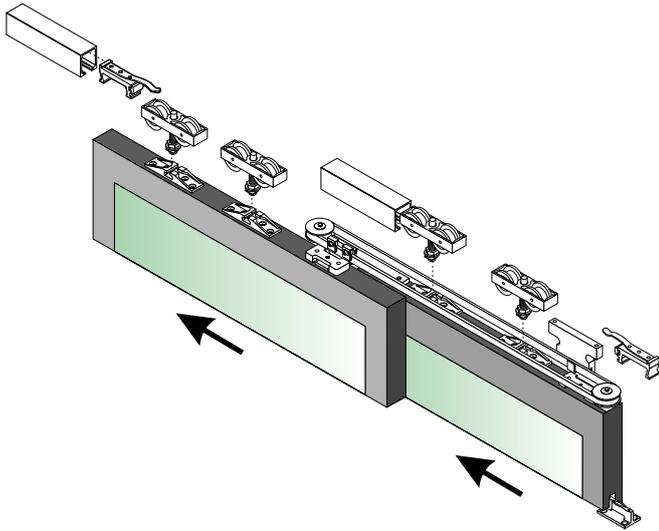

- Options available for simultaneous sliding of three panels in the same direction.
- Same system can be used with Aluminium framed panels.



[www.sio.co.in](http://www.sio.co.in)

## SIO VASUNDDHARA INTERNATIONAL PVT. LTD.

Founded with the vision to work with fairness, honesty and courtesy towards all internal and external stakeholders to achieve the company's objectives, Sio Vasunddhara International has serviced such prestigious names as ABB, DLF, LnT, PVR, TAJ hotels and resorts, Unitech, Fortis, Airtel, bata, The Oberoi, HP, Raheja developers and many others.